


- NOTES:
1. ALL RESISTORS 1/4 W 10% CARBON COMP. EXCEPT AS NOTED
 2. 1% RESISTORS RN55D TYPE METAL FILM
 3. ALL DIODES IN 414B
 4. ALL CAPACITORS CERAMIC DISC EXCEPT AS NOTED


REVISIONS			Cetus, Inc.	
NO.	DATE	BY	REVISED	REASON
A	ADDED Q4	12-31-70		
B	20-2560	07C		
C	5-0-119	12-31-70		
D	20-0792	12/1/72		
E	11-6-79			
F				

SCHEMATIC, 4015 MODULE, SAMPLE & HOLD

10-7-71


8-9015-0010

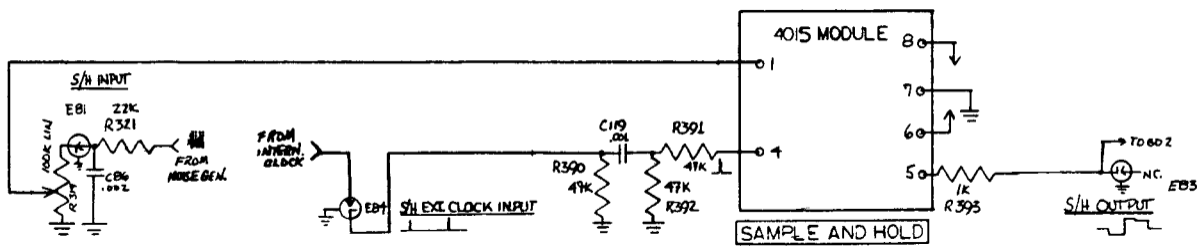

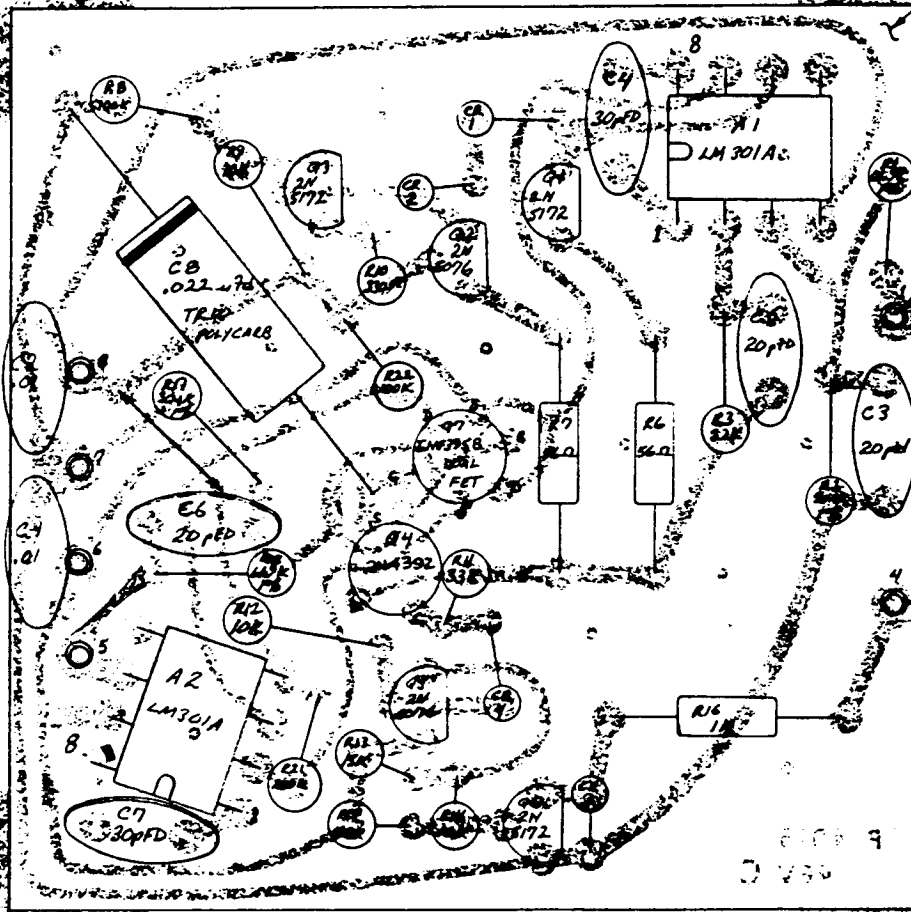

NOTES

1. INSTALL 1 JUMPER PRIOR TO MOUNTING COMPONENTS AS SHOWN (→) USE 24 GA. SOLID WIRE
2. OBSERVE POLARITY OF OP-AMPS, AND CAPACITOR C8
3. ALL DIODES 1N4148 OR EQUIV. MOUNT WITH BAND END DOWN (SEE DETAIL 1)
4. FOR PARTS LIST SEE APL 4015-005



DETAIL 1. (Typical)
BAND END ON BOARD
ALL DIODES

REVISIONS		torus, inc.	
A	REV 001		
B	REV 002		
C	REV 003		
D	REV 004		
E	REV 005		
F	REV 006		
G	REV 007		
H	REV 008		
I	REV 009		
J	REV 010		

P.C. ASSEMBLY	
SAMPLE & HOLD	
4015 MODULE	
DATE	REV
11-17-78	1
DESIGNED BY	APL 4015
CHECKED BY	
DATE	
REVISED BY	
DATE	
REVISED BY	
DATE	
REVISED BY	
DATE	
REVISED BY	
DATE	